


Specification Sheet for Product:
Hinkley Lighting 1563MBS
Matte Black Stainless Taper 12v 1.9w 5" Wide LED Step Light

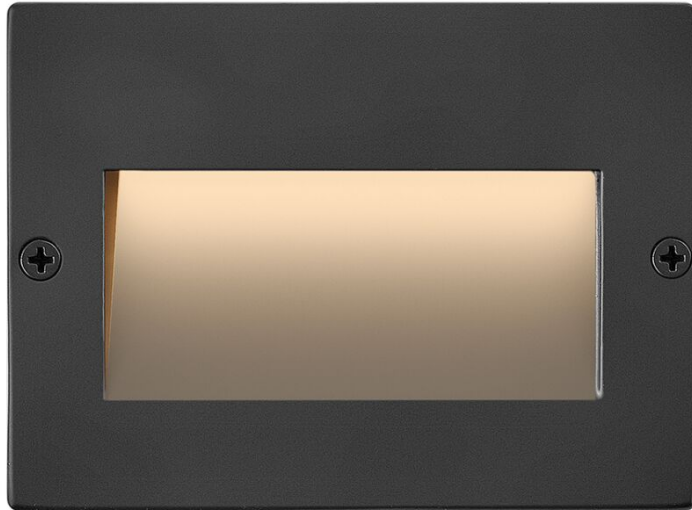

TAPER

1563MBS

STEP 12V HORIZONTAL

Seamlessly blending into architectural elements inside or outside the home, the Taper series beautifully illuminates stairs, walkways, or patio spaces to enhance any lighting experience. Part of the Sparta Series, Taper Step Lights with Matte Black Stainless finishes feature a durable 316 stainless steel construction, offering superior strength in harsh environments. A recessed mount and integrated 12v LEDs can be easily integrated into masonry or wooden structures, providing a practical, low-voltage solution for any setting.

DETAILS	
FINISH:	Matte Black Stainless
MATERIAL:	Stainless Steel
GLASS:	Etched Lens
DIMMABLE:	YES - WITH MLV ON TRANSFORMER PRIMARY

DIMENSIONS	
WIDTH:	5"
HEIGHT:	3.5"
DEPTH:	1

LIGHT SOURCE	
LIGHT SOURCE:	Integrated LED
LED NAME:	ETP15
WATTAGE:	1.90w LED *Included
VOLTAGE:	12v
VOLT AMPS:	2.3
COLOR TEMP:	2700
LUMENS:	160
CRI:	90
INCANDESCENT EQUIVALENCY:	1 x 15w
DIMMABLE:	YES - WITH MLV ON TRANSFORMER PRIMARY
TRANSFORMER REQUIRED:	Yes

MOUNTING	
LEAD WIRE:	1 X 60"

SHIPPING	
CARTON LENGTH:	12.8
CARTON WIDTH:	12.8
CARTON HEIGHT:	10
CARTON WEIGHT:	1.3



PRODUCT DETAILS:

- Stainless steel provides superior strength and performance
- Suitable for use in wet (outdoor direct rain) locations as defined by NEC and CEC. Meets United States UL Underwriters Laboratories & CSA Canadian Standards Association Product Safety Standards
- A wiring kit is supplied
- ADA compliant
- For more information on how to control your landscape lighting via the Hinkley Home Automation App, [click here](#).
- Recessed mount.
- Rated for both indoor and outdoor use
- Easy and efficient installation: fewer fixtures illuminate a more extensive area, offering a diverse range of mounting opportunities.

HINKLEY

HINKLEY
33000 Pin Oak Parkway
Avon Lake, OH 44012

PHONE: (440) 653-5500
Toll Free: 1 (800) 446-5539

hinkley.com

Specification Sheet for Product:
Progress Lighting P500276-031-30
Black Planck LED 47" Wide LED Linear Chandelier

Planck LED

Ceiling cord Mounted • Damp Location Listed **PROGRESS LED**

Description:

Provide a dramatic architectural lighting design to any space with this LED pendant. A smooth metal beam with a brushed nickel finish suspends from the ceiling to add clean visual interest to minimalist residential or commercial settings. The frame holds a polycarbonate shade in place to complete the design.

Specifications:

- White polycarbonate Diffuser
- The frame holds a polycarbonate shade in place to complete the design.
- A smooth metal beam with a brushed nickel finish suspends from the ceiling to add clear visual interest to minimalist residential or commercial settings.
- Provide a dramatic architectural lighting design to any space.
- Ideal for any hallway, foyer, kitchen, or dining room.
- Perfect for transitional, modern, or contemporary settings.
- Measures 47-1/4-inch width by 1-3/8-inch height.
- Uses one integrated LED that is included (39w max).
- Compatible with many Triac/ELV dimmers (see dimming controls)
- Includes installation instructions and mounting hardware.
- Progress Lighting products are designed for exceptional quality, reliability, and functionality.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" recessed outlet box: 21.5 in W., 4.75 in ht., 1.25 in depth
- Mounting backplate for outlet box included
- 108 in of wire supplied

Performance:

Number of Modules	1
Input Power	39 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Delivered)	2,900/74 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	50000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class B
Warranty	5-year Limited Warranty
Labels	cETLus Damp Location Listed
	Meets California Title 24 JA8-2016

P500276-009-30



Dimensions:

Width: 47-1/4 in
 Height: 1-3/8 in
 Depth: 1-3/4 in
 Overall Ht. W/Wire: 113 in


White polycarbonate Diffuser
 Width: 46-7/16 in
 Height: 0-1/16 in

Photometrics:

P500276-009-30

ELECTRICAL DATA		P500276-009-30
Input Voltage		120 V
Input Frequency		60 Hz
THD		<20%
EMI/RFI		FCC Title 47, Part 15, Class B
Operating Temperature		-30 °C to 30 °C
Dimming		Yes*
Over-voltage, over-current, short-circuit protected		
*See Dimming Notes for more information		

P500276-009-30
 LED Light Engine: 3000 K 90 CRI
 System Wattage: 39
 Fixture delivered lumens: 2745
 Fixture Efficacy: 72.4
 Spacing Criteria: 1.25 | 1.19

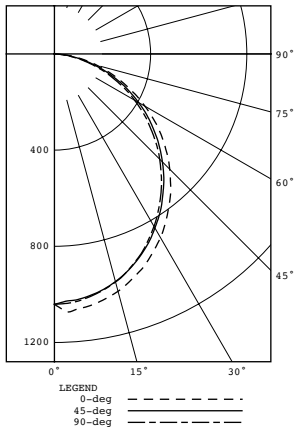

CANDELA DISTRIBUTION						
CANDELA	DISTRIBUTION					
0.0	22.5	45.0	67.5	90.0		
0	1041	1041	1041	1041	1041	
5	1066	1030	1027	1035	1034	98
15	1022	986	980	986	982	279
25	936	902	893	890	888	414
35	818	786	775	766	762	487
45	678	650	635	623	619	493
55	522	498	484	469	466	434
65	347	337	325	308	305	321
75	184	175	165	156	152	176
85	48	42	35	29	29	43
90	0	0	0	0	0	

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXT
0-30	791	28.8
0-40	1278	46.6
0-60	2205	80.3
0-90	2745	100.0
90-180	0	0.0
0-180	2745	100.0

Test 19.01614 Test Date 09/12/19

P500276-009-30

Dimming Notes:

P500276-009-30 is designed to be compatible with many Triac/Forward Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls:

Leviton 6672

Lutron NTEVL-300

Lutron DVELV-300P

Lutron DVCL-253P

Lutron Caseta Wireless

Lutron AYCL-153P

Lutron TGCL-153-PH-WH

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.

Specification Sheet for Product:

MinkaAire F524-CL

**Coal Roto 52" 3 Blade Indoor Ceiling Fan with Wall Control
Included**




Item #
F524-ABD
Product Family Name:
Roto
Category:
INTERIOR FAN
Certification
4000048
Patents:
U.S. Patent(s): D750,221
Notes:

UPC Code:
706411045455
Finish:
Brushed Aluminum
Category Type:
Ceiling Fan



Image File Name: **F524-ABD.jpg**



MEASUREMENTS

Blade Finish:		Reversible Blades:	
		No	
Blade Material:		Slope:	
ABS CONSTRUCTION		Yes	
Blade Sweep:	No. of Blades:	Blade Pitch:	Hanging Weight:
52"	3	22 DEGREES	10.36
Downrod 1:	Downrod 1 Outside Dia:	Downroad 2:	Downrod 2 Outside Dia:
6	0.75		
Ceiling to Lowest Point: (Dim A)	Ceiling to Blade (Dim B)	Lead Wire:	Motor Size:
11.75	9.5	80	153x15mm

	Low	Low/Med.	Medium	Med/High	High
RPM:	73				203
Amps:	0.17				0.42
Watts:	9.16				57.72
CFM:	1553.0				4422.0
CFM/Watts:	169.54				76.61

LAMPING

No. of Bulbs:	Light Type:	Light Kit Optional: No		
0				
Max Bulb Wattage:	Socket:			
Integrated Light Kit: No	Dimmable: No	Ballast:	Rated Life Hours:	Uplight: No
Bulb/LED Included:	Color Temp.:	CRI:	Initial Lumens:	Delivered Lumens:

GLASS

Description:		Material:
Part No.:		Quantity:
Width:	Height:	Length:



CONTROLS

Pull Chain Control:	Works with Remote Control:	Works with Wall Control:
No	Yes	Yes
Reversible:	Included Remote Control:	Included Wall Control:
Yes		WC105-WH
Smart Control:	Compatible Remote Control(s):	Compatible Wall Control(s):
No	RCS223	WCS223
Integrated Smart Control:		Compatible Smart Control:



SHIPPING

Carton Width:	Carton Height:	Carton Length:	
9.5	9.0	24.75	
Carton Weight:	Carton Cubic Feet:	Small Package Shippable:	
12.76	1.225	Yes	
Master Pack Width:	Master Pack Height:	Master Pack Length:	
Master Pack Weight:	Master Cubic Feet:	Multi-Pack:	Master Pack:
			1



ETL
Intertek



WARNING:Handling this product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. Wash hands with soap and water after installing, handling, cleaning or otherwise touching this product. For more information go to: www.P65Warnings.ca.gov.


For additional information, please contact Customer Care: 1-800-221-7977 | Product depicted on this spec sheet is protected by United States Federal and/or State laws including US Patent, Trademark and/or Copyright and unfair competition laws. Unauthorized reproduction or use carries severe legal penalties.



Item #	UPC Code:
F524-CL	706411060823
Product Family Name:	Finish:
Roto	Coal
Category:	Category Type:
INTERIOR FAN	Ceiling Fan
Certification	
4000048	
Patents:	
U.S. Patent(s): D750,221	
Notes:	



Image File Name: F524-CL.jpg



MEASUREMENTS

Blade Finish:	Reversible Blades:				
	No				
Blade Material:	Slope:				
ABS Construction	Yes				
Blade Sweep:	No. of Blades:	Blade Pitch:	Hanging Weight:		
52"	3	22 DEGREES	10.36		
Downrod 1:	Downrod 1 Outside Dia:	Downroad 2:	Downrod 2 Outside Dia:		
6	.75				
Ceiling to Lowest Point: (Dim A)	Ceiling to Blade (Dim B)	Lead Wire:	Motor Size:		
11.75	9.5	80	153X15mm		
	Low	Low/Med.	Medium	Med/High	High
RPM:	73				203
Amps:	0.17				0.42
Watts:	9.16				57.72
CFM:	1553.0				4422.0
CFM/Watts:	169.54				76.61



CONTROLS

Pull Chain Control:	Works with Remote Control:	Works with Wall Control:
No	Yes	Yes
Reversible:	Included Remote Control:	Included Wall Control:
Yes		WC105-WH
Smart Control:	Compatible Remote Control(s):	Compatible Wall Control(s):
No	RCS223	WCS223
Integrated Smart Control:		Compatible Smart Control:

LAMPING

No. of Bulbs:	Light Type:	Light Kit Optional: No			
0					
Max Bulb Wattage:	Socket:				
Integrated Light Kit: No	Dimmable: No	Ballast:	Rated Life Hours:	Uplight: No	
Bulb/LED Included:	Color Temp.:	CRI:	Initial Lumens:	Delivered Lumens:	

GLASS

Description:	Material:	
Part No.:	Quantity:	
Width:	Height:	Length:



SHIPPING

Carton Width:	Carton Height:	Carton Length:	
9.5	9.0	24.75	
Carton Weight:	Carton Cubic Feet:	Small Package Shippable:	
12.76	1.225	Yes	
Master Pack Width:	Master Pack Height:	Master Pack Length:	
Master Pack Weight:	Master Cubic Feet:	Multi-Pack:	Master Pack:
		1	1



ETL
Intertek



WARNING:Handling this product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. Wash hands with soap and water after installing, handling, cleaning or otherwise touching this product. For more information go to: www.P65Warnings.ca.gov.

For additional information, please contact Customer Care: 1-800-221-7977 | Product depicted on this spec sheet is protected by United States Federal and/or State laws including US Patent, Trademark and/or Copyright and unfair competition laws. Unauthorized reproduction or use carries severe legal penalties.




Item #
F524-DK
Product Family Name:
Roto
Category:
INTERIOR FAN
Certification
4000048
Patents:
U.S. Patent(s): D750,221
Notes:

UPC Code:
706411050817
Finish:
Distressed Koa
Category Type:
Ceiling Fan



Image File Name: **F524-DK.jpg**



MEASUREMENTS

Blade Finish:		Reversible Blades:	
		No	
Blade Material:		Slope:	
ABS Construction		Yes	
Blade Sweep:	No. of Blades:	Blade Pitch:	Hanging Weight:
52"	3	22 degrees	10.36
Downrod 1:	Downrod 1 Outside Dia:	Downroad 2:	Downrod 2 Outside Dia:
6	0.75		
Ceiling to Lowest Point: (Dim A)	Ceiling to Blade (Dim B)	Lead Wire:	Motor Size:
11.75	9.5	80	153x15mm

	Low	Low/Med.	Medium	Med/High	High
RPM:	73				203
Amps:	0.17				0.42
Watts:	9.16				57.72
CFM:	1553.0				4422.0
CFM/Watts:	169.54				76.61



CONTROLS

Pull Chain Control:	Works with Remote Control:	Works with Wall Control:
No	Yes	Yes
Reversible:	Included Remote Control:	Included Wall Control:
Yes		WC105-WH
Smart Control:	Compatible Remote Control(s):	Compatible Wall Control(s):
No	RCS223	WCS223
Integrated Smart Control:		Compatible Smart Control:

LAMPING

No. of Bulbs:	Light Type:	Light Kit Optional: No		
0				
Max Bulb Wattage:	Socket:			
Integrated Light Kit:	Dimmable:	Ballast:	Rated Life Hours:	Uplight:
No	No			No
Bulb/LED Included:	Color Temp.:	CRI:	Initial Lumens:	Delivered Lumens:

GLASS

Description:		Material:
Part No.:		Quantity:
Width:	Height:	Length:



SHIPPING

Carton Width:	Carton Height:	Carton Length:	
9.5	9.0	24.75	
Carton Weight:	Carton Cubic Feet:	Small Package Shippable:	
12.76	1.225	Yes	
Master Pack Width:	Master Pack Height:	Master Pack Length:	
Master Pack Weight:	Master Cubic Feet:	Multi-Pack:	Master Pack:
			1



ETL
Intertek



WARNING:Handling this product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. Wash hands with soap and water after installing, handling, cleaning or otherwise touching this product. For more information go to: www.P65Warnings.ca.gov.

For additional information, please contact Customer Care: 1-800-221-7977 | Product depicted on this spec sheet is protected by United States Federal and/or State laws including US Patent, Trademark and/or Copyright and unfair competition laws. Unauthorized reproduction or use carries severe legal penalties.




Item #
F524-ORB
Product Family Name:
Roto
Category:
INTERIOR FAN
Certification
4000048
Patents:
U.S. Patent(s): D750,221
Notes:

UPC Code:
706411045479
Finish:
Oil Rubbed Bronze
Category Type:
Ceiling Fan



Image File Name: **F524-ORB.jpg**



MEASUREMENTS

Blade Finish:		Reversible Blades:	
		No	
Blade Material:		Slope:	
ABS Construction		Yes	
Blade Sweep:	No. of Blades:	Blade Pitch:	Hanging Weight:
52"	3	22 DEGREES	10.36
Downrod 1:	Downrod 1 Outside Dia:	Downroad 2:	Downrod 2 Outside Dia:
6	0.75		
Ceiling to Lowest Point: (Dim A)	Ceiling to Blade (Dim B)	Lead Wire:	Motor Size:
11.75	9.5	80	153x15mm

	Low	Low/Med.	Medium	Med/High	High
RPM:	73				203
Amps:	0.17				0.42
Watts:	9.16				57.72
CFM:	1553.0				4422.0
CFM/Watts:	169.54				76.61



CONTROLS

Pull Chain Control:	Works with Remote Control:	Works with Wall Control:
No	Yes	Yes
Reversible:	Included Remote Control:	Included Wall Control:
Yes		WC105-WH
Smart Control:	Compatible Remote Control(s):	Compatible Wall Control(s):
No	RCS223	WCS223
Integrated Smart Control:		Compatible Smart Control:

LAMPING

No. of Bulbs:	Light Type:	Light Kit Optional: No		
0				
Max Bulb Wattage:	Socket:			
Integrated Light Kit:	Dimmable:	Ballast:	Rated Life Hours:	Uplight:
No	No			No
Bulb/LED Included:	Color Temp.:	CRI:	Initial Lumens:	Delivered Lumens:

GLASS

Description:	Material:
Part No.:	Quantity:
Width:	Height:
	Length:



SHIPPING

Carton Width:	Carton Height:	Carton Length:	
9.5	9.0	24.75	
Carton Weight:	Carton Cubic Feet:	Small Package Shippable:	
12.76	1.225	Yes	
Master Pack Width:	Master Pack Height:	Master Pack Length:	
Master Pack Weight:	Master Cubic Feet:	Multi-Pack:	Master Pack:
			1



ETL
Intertek



WARNING:Handling this product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. Wash hands with soap and water after installing, handling, cleaning or otherwise touching this product. For more information go to: www.P65Warnings.ca.gov.

For additional information, please contact Customer Care: 1-800-221-7977 | Product depicted on this spec sheet is protected by United States Federal and/or State laws including US Patent, Trademark and/or Copyright and unfair competition laws. Unauthorized reproduction or use carries severe legal penalties.




Item #
F524-WHF
Product Family Name:
Roto
Category:
INTERIOR FAN
Certification
4000048
Patents:
U.S. Patent(s): D750,221
Notes:

UPC Code:
706411045462
Finish:
Flat White
Category Type:
Ceiling Fan



Image File Name: **F524-WHF.jpg**



MEASUREMENTS

Blade Finish:		Reversible Blades:	
		No	
Blade Material:		Slope:	
ABS Construction		Yes	
Blade Sweep:	No. of Blades:	Blade Pitch:	Hanging Weight:
52"	3	22	10.36
Downrod 1:	Downrod 1 Outside Dia:	Downroad 2:	Downrod 2 Outside Dia:
6	0.75		
Ceiling to Lowest Point: (Dim A)	Ceiling to Blade (Dim B)	Lead Wire:	Motor Size:
11.75	9.5	80	153x15mm

	Low	Low/Med.	Medium	Med/High	High
RPM:	73				203
Amps:	0.17				0.42
Watts:	9.16				57.72
CFM:	1553.0				4422.0
CFM/Watts:	169.54				76.61



CONTROLS

Pull Chain Control:	Works with Remote Control:	Works with Wall Control:
No	Yes	Yes
Reversible:	Included Remote Control:	Included Wall Control:
Yes		WC105-WH
Smart Control:	Compatible Remote Control(s):	Compatible Wall Control(s):
No	RCS223	WCS223
Integrated Smart Control:		Compatible Smart Control:

LAMPING

No. of Bulbs:	Light Type:	Light Kit Optional: No		
0				
Max Bulb Wattage:	Socket:			
Integrated Light Kit: No	Dimmable: No	Ballast:	Rated Life Hours:	Uplight: No
Bulb/LED Included:	Color Temp.:	CRI:	Initial Lumens:	Delivered Lumens:

GLASS

Description:		Material:
Part No.:		Quantity:
Width:	Height:	Length:



SHIPPING

Carton Width:	Carton Height:	Carton Length:	
9.5	9.0	24.75	
Carton Weight:	Carton Cubic Feet:	Small Package Shippable:	
12.76	1.225	Yes	
Master Pack Width:	Master Pack Height:	Master Pack Length:	
Master Pack Weight:	Master Cubic Feet:	Multi-Pack:	Master Pack:
			1



ETL
Intertek



WARNING:Handling this product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. Wash hands with soap and water after installing, handling, cleaning or otherwise touching this product. For more information go to: www.P65Warnings.ca.gov.

For additional information, please contact Customer Care: 1-800-221-7977 | Product depicted on this spec sheet is protected by United States Federal and/or State laws including US Patent, Trademark and/or Copyright and unfair competition laws. Unauthorized reproduction or use carries severe legal penalties.

Specification Sheet for Product:

MinkaAire F624-CL

**Coal Roto XL 62" 3 Blade Indoor / Outdoor Ceiling Fan with Wall
Control Included**



Item #
F624-ABD

Product Family Name:
Roto XL

Category:
EXTERIOR FAN

Certification
4000048

Patents:
U.S. Patent(s): D750,221; Add'l U.S. Patent(s) Pending

Notes:


UPC Code:
706411054280

Finish:
Brushed Aluminum

Category Type:
Ceiling Fan



Image File Name: **F624-ABD.jpg**



MEASUREMENTS

Blade Finish:		Reversible Blades:	
		No	
Blade Material:		Slope:	
ABS CONSTRUCTION		Yes	
Blade Sweep:	No. of Blades:	Blade Pitch:	Hanging Weight:
62"	3	20 DEGREES	13.76
Downrod 1:	Downrod 1	Downrod 2:	Downrod 2
6	Outside Dia:		Outside Dia:
	0.75		
Ceiling to Lowest Point: (Dim A)	Ceiling to Blade (Dim B)	Lead Wire:	Motor Size:
10.25	8.75	80	172X16MM

	Low	Low/Med.	Medium	Med/High	High
RPM:	65		136		188
Amps:	0.22		0.44		0.59
Watts:	9.75		38.33		70.69
CFM:	2185.0		5533.0		7567.0
CFM/Watts:	224.1		144.35		107.04



CONTROLS

Pull Chain Control:	Works with Remote Control:	Works with Wall Control:
No	No	Yes
Reversible:	Included Remote Control:	Included Wall Control:
Yes		WC115
Smart Control:	Compatible Remote Control(s):	Compatible Wall Control(s):
No		
Integrated Smart Control:		Compatible Smart Control:

LAMPING

No. of Bulbs:	Light Type:	Light Kit Optional: No		
0				
Max Bulb Wattage:	Socket:			
Integrated Light Kit:	Dimmable:	Ballast:	Rated Life Hours:	Uplight:
No	No			No
Bulb/LED Included:	Color Temp.:	CRI:	Initial Lumens:	Delivered Lumens:

GLASS

Description:		Material:
Part No.:		Quantity:
Width:	Height:	Length:



SHIPPING

Carton Width:	Carton Height:	Carton Length:
10.0	7.88	30.25
Carton Weight:	Carton Cubic Feet:	Small Package Shippable:
16.28	1.379	Yes
Master Pack Width:	Master Pack Height:	Master Pack Length:
Master Pack Weight:	Master Cubic Feet:	Multi-Pack:
		Master Pack:
		1



Wet Location



ETL Intertek


WARNING: Handling this product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. Wash hands with soap and water after installing, handling, cleaning or otherwise touching this product. For more information go to: www.P65Warnings.ca.gov.

For additional information, please contact Customer Care: 1-800-221-7977 | Product depicted on this spec sheet is protected by United States Federal and/or State laws including US Patent, Trademark and/or Copyright and unfair competition laws. Unauthorized reproduction or use carries severe legal penalties.



Image File Name: **F624-CL.jpg**

Item #	UPC Code:
F624-CL	706411061547
Product Family Name:	Finish:
Roto XL	Coal
Category:	Category Type:
EXTERIOR FAN	Ceiling Fan
Certification	
4000048	
Patents:	
Notes:	



MEASUREMENTS

Blade Finish:			Reversible Blades:
			No
Blade Material:			Slope:
ABS			Yes
Blade Sweep:	No. of Blades:	Blade Pitch:	Hanging Weight:
62"	3	20	13.76
Downrod 1:	Downrod 1	Downrod 2:	Downrod 2
6	Outside Dia:		Outside Dia:
	.75		
Ceiling to Lowest Point: (Dim A)	Ceiling to Blade (Dim B)	Lead Wire:	Motor Size:
10.25	8.63	80	172x16MM

	Low	Low/Med.	Medium	Med/High	High
RPM:	83				183
Amps:	0.29				0.6
Watts:	16.6				71.34
CFM:	2526.0				5927.0
CFM/Watts:	152.17				83.08



CONTROLS

Pull Chain Control:	Works with Remote Control:	Works with Wall Control:
No	No	Yes
Reversible:	Included Remote Control:	Included Wall Control:
Yes		WC115
Smart Control:	Compatible Remote Control(s):	Compatible Wall Control(s):
No		
Integrated Smart Control:		Compatible Smart Control:

LAMPING

No. of Bulbs:	Light Type:	Light Kit Optional: No		
0				
Max Bulb Wattage:	Socket:			
Integrated Light Kit:	Dimmable:	Ballast:	Rated Life Hours:	Uplight:
No	No			No
Bulb/LED Included:	Color Temp.:	CRI:	Initial Lumens:	Delivered Lumens:

GLASS

Description:		Material:
Part No.:		Quantity:
Width:	Height:	Length:



SHIPPING

Carton Width:	Carton Height:	Carton Length:	
10.0	7.88	30.25	
Carton Weight:	Carton Cubic Feet:	Small Package Shippable:	
16.28	1.379	Yes	
Master Pack Width:	Master Pack Height:	Master Pack Length:	
Master Pack Weight:	Master Cubic Feet:	Multi-Pack:	Master Pack:
		1	1



Wet Location



ETL Intertek



WARNING: Handling this product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. Wash hands with soap and water after installing, handling, cleaning or otherwise touching this product. For more information go to: www.P65Warnings.ca.gov.

For additional information, please contact Customer Care: 1-800-221-7977 | Product depicted on this spec sheet is protected by United States Federal and/or State laws including US Patent, Trademark and/or Copyright and unfair competition laws. Unauthorized reproduction or use carries severe legal penalties.



Item #
F624-ORB

Product Family Name:
Roto XL

Category:
EXTERIOR FAN

Certification
4000048

Patents:
U.S. Patent(s): D750,221; Add'l U.S. Patent(s) Pending

Notes:


UPC Code:
706411054228

Finish:
Oil Rubbed Bronze

Category Type:
Ceiling Fan



Image File Name: **F624-ORB.jpg**



MEASUREMENTS

Blade Finish:		Reversible Blades:	
		No	
Blade Material:		Slope:	
ABS CONSTRUCTION		Yes	
Blade Sweep:	No. of Blades:	Blade Pitch:	Hanging Weight:
62"	3	20 DEGREES	13.76
Downrod 1:	Downrod 1	Downrod 2:	Downrod 2
6	Outside Dia:		Outside Dia:
	0.75		
Ceiling to Lowest Point: (Dim A)	Ceiling to Blade (Dim B)	Lead Wire:	Motor Size:
10.25	8.75	80"	172X16MM

	Low	Low/Med.	Medium	Med/High	High
RPM:	65		136		188
Amps:	0.22		0.44		0.59
Watts:	9.75		38.33		70.69
CFM:	2185.0		5533.0		7567.0
CFM/Watts:	224.1		144.35		107.04



CONTROLS

Pull Chain Control:	Works with Remote Control:	Works with Wall Control:
No	No	Yes
Reversible:	Included Remote Control:	Included Wall Control:
Yes		WC115
Smart Control:	Compatible Remote Control(s):	Compatible Wall Control(s):
No		
Integrated Smart Control:		Compatible Smart Control:

LAMPING

No. of Bulbs:	Light Type:	Light Kit Optional: No		
0				
Max Bulb Wattage:	Socket:			
Integrated Light Kit:	Dimmable:	Ballast:	Rated Life Hours:	Uplight:
No	No			No
Bulb/LED Included:	Color Temp.:	CRI:	Initial Lumens:	Delivered Lumens:

GLASS

Description:		Material:
Part No.:		Quantity:
Width:	Height:	Length:



SHIPPING

Carton Width:	Carton Height:	Carton Length:
10.0	7.88	30.25
Carton Weight:	Carton Cubic Feet:	Small Package Shippable:
16.28	1.379	Yes
Master Pack Width:	Master Pack Height:	Master Pack Length:
Master Pack Weight:	Master Cubic Feet:	Multi-Pack:
		Master Pack:
		1



Wet Location



ETL Intertek

WARNING: Handling this product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. Wash hands with soap and water after installing, handling, cleaning or otherwise touching this product. For more information go to: www.P65Warnings.ca.gov.

For additional information, please contact Customer Care: 1-800-221-7977 | Product depicted on this spec sheet is protected by United States Federal and/or State laws including US Patent, Trademark and/or Copyright and unfair competition laws. Unauthorized reproduction or use carries severe legal penalties.



Item #
F624-WHF

Product Family Name:
Roto XL

Category:
EXTERIOR FAN

Certification
4000048

Patents:
U.S. Patent(s): D750,221; Add'l U.S. Patent(s) Pending

Notes:


UPC Code:
706411054235

Finish:
Flat White

Category Type:
Ceiling Fan



Image File Name: **F624-WHF.jpg**



MEASUREMENTS

Blade Finish:		Reversible Blades:	
		No	
Blade Material:		Slope:	
ABS CONSTRUCTION		Yes	
Blade Sweep:	No. of Blades:	Blade Pitch:	Hanging Weight:
62"	3	20 DEGREES	13.76
Downrod 1:	Downrod 1	Downrod 2:	Downrod 2
6	Outside Dia:		Outside Dia:
	0.75		
Ceiling to Lowest Point: (Dim A)	Ceiling to Blade (Dim B)	Lead Wire:	Motor Size:
10.25	8.75	80	172X16MM

	Low	Low/Med.	Medium	Med/High	High
RPM:	65		136		188
Amps:	0.22		0.44		0.59
Watts:	9.75		38.33		70.69
CFM:	2185.0		5533.0		7567.0
CFM/Watts:	224.1		144.35		107.04



CONTROLS

Pull Chain Control:	Works with Remote Control:	Works with Wall Control:
No	No	Yes
Reversible:	Included Remote Control:	Included Wall Control:
Yes		WC115
Smart Control:	Compatible Remote Control(s):	Compatible Wall Control(s):
No		
Integrated Smart Control:		Compatible Smart Control:

LAMPING

No. of Bulbs:	Light Type:	Light Kit Optional: No		
0				
Max Bulb Wattage:	Socket:			
Integrated Light Kit:	Dimmable:	Ballast:	Rated Life Hours:	Uplight:
No	No			No
Bulb/LED Included:	Color Temp.:	CRI:	Initial Lumens:	Delivered Lumens:

GLASS

Description:		Material:
Part No.:		Quantity:
Width:	Height:	Length:



SHIPPING

Carton Width:	Carton Height:	Carton Length:
10.0	7.88	30.25
Carton Weight:	Carton Cubic Feet:	Small Package Shippable:
16.28	1.379	Yes
Master Pack Width:	Master Pack Height:	Master Pack Length:
Master Pack Weight:	Master Cubic Feet:	Multi-Pack:
		Master Pack:
		1



Wet Location




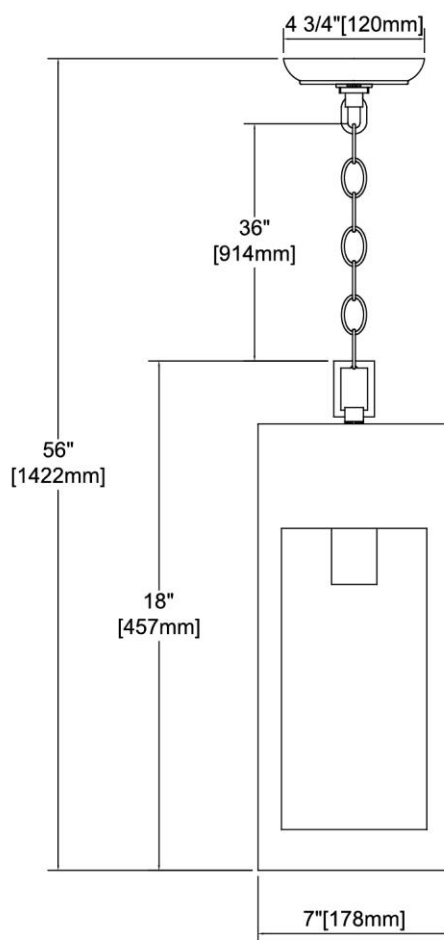
ETL Intertek

WARNING: Handling this product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. Wash hands with soap and water after installing, handling, cleaning or otherwise touching this product. For more information go to: www.P65Warnings.ca.gov.

For additional information, please contact Customer Care: 1-800-221-7977 | Product depicted on this spec sheet is protected by United States Federal and/or State laws including US Patent, Trademark and/or Copyright and unfair competition laws. Unauthorized reproduction or use carries severe legal penalties.

Specification Sheet for Product:
Elk Lighting 57303/1
Charcoal Angus 7" Wide Outdoor Mini Pendant

				ITEM #: 57303/1			
				UPC 748119141794			
				Description Angus 1-Light Outdoor Pendant in Charcoal with Seedy Glass Enclosure			
				Finish Charcoal			
				Materials Glass, Steel			
				Brand ELK Lighting			
				Collection Angus			
				Category Outdoor Lighting			
				Type Hanging			
ITEM DIMENSIONS				RATINGS & SPECIFICATIONS			
Width	7 inches			Safety Rating UL		Certification Damp locations	
Depth	7 inches			ADA Compliant N/A		Voltage 120 volts	
Height	18 inches			BULBS / SOCKETS			
Weight	7 pounds			Quantity	1	Wattage	60 watts
ADDITIONAL DIMENSIONS				Included	No	Type	A19 (E26 Medium Base)
Backplate / Canopy		4.75 diameter		Other	N/A		
HCWO		N/A		CHAIN / CORD INFORMATION			
Min. Extension		N/A		Chain	36 inches	Cord	72 inches
Max. Extension		N/A		SHADE / GLASS DETAILS			
OVERALL HEIGHT				Shade/Glass Description Seedy Glass Enclosure			
Min.	21 inches	Max.	56 inches				
EXTENSION ROD(S)				Width N/A		Height	N/A
N/A				Width at Top N/A		Width at Bottom	N/A



Specification Sheet for Product:

Satco Lighting S12415

**Clear Single 8 Watt Vintage Edison Dimmable A19 Medium (E26)
LED Bulb - 800 Lumens, 3000K, and 90CRI**




S12415

8A19/CL/LED/E26/930/120V

GENERAL SPECIFICATIONS

Shape:	A19
Wattage:	8W
Lumen Output:	800L
Color Temperature:	3000K
Base:	Medium



TECHNICAL SPECIFICATIONS

Wattage:	8W	CRI:	90CRI
Volts:	120V	Lumen Output:	800L
Incandescent Equivalent:	60	Dimmable:	Yes-Dimmable
Shape:	A19	Beam Spread:	320D
Filament:	LED Filament	Power Factor:	0.7
Base:	Medium	Operating Temp:	-20C (-4F) to a maximum of +45C (+113F)
ANSI Base:	E26	Safety Listing:	cULus Listed
Finish:	Clear	Technology:	LED
Hours Rated:	15000H	Material:	Glass; Aluminum
Color Temperature:	3000K		

DIMENSIONS

MOL:	4.02"
MOD:	2.36"
Weight:	0.07

LISTINGS

Safety Listing:	cULus Listed
Location Rating:	Wet
Energy Star:	Pending
FCC Compliant:	Yes
Title 20:	Yes
CEC Terse:	Lawful for sale
JA8 Compliant:	No
RoHS Compliant:	Yes
SDS Class:	LED_Lamp

PACKAGING

Each UPC:	045923124150	Inner UPC:	20045923124154	Case UPC:	10045923124157
Each Quantity:	1	Inner Quantity:	6	Case Quantity:	24
Each Dimensions:	2.52 x 2.52 x 4.57"	Inner Dimensions:	8.07 x 5.51 x 4.92"	Case Dimensions:	22.83 x 8.66 x 5.71"

110 Heartland Blvd.
Brentwood, NY 11717
PH 631-243-2022
FX 631-243-2027

Distribution Centers
New York, Florida,
Texas, Washington,
California, Puerto Rico

National Toll-Free
800-43-SATCO
(800-437-2826)
www.satco.com

Copyright 2021
Satco Products, Inc.
All Rights Reserved
June 10, 2021

COMPATIBLE DIMMERS

Brand	Model #
Leviton	6674
Leviton	TSM10
Lutron	AYCL-153P
Lutron	CTCL-153P
Lutron	CTRP-253P
Lutron	DVCL-153P
Lutron	DVRP-253P
Lutron	LECL-153PH
Lutron	MA-PRO
Lutron	MACL-153M
Lutron	NTCL-250
Lutron	NTRP-250
Lutron	PD-6WCL
Lutron	SCL-153P
Satco	S11268

110 Heartland Blvd.
Brentwood, NY 11717
PH 631-243-2022
FX 631-243-2027

Distribution Centers
New York, Florida,
Texas, Washington,
California, Puerto Rico

National Toll-Free
800-43-SATCO
(800-437-2826)
www.satco.com


Copyright 2021
Satco Products, Inc.
All Rights Reserved
June 10, 2021

Specification Sheet for Product:
Elk Lighting 57300/1
Charcoal Angus 13" Tall Outdoor Wall Sconce



ITEM #:	57300/1
UPC	748119141763
Description	Angus 1-Light Outdoor Sconce in Charcoal with Seedy Glass Enclosure
Finish	Charcoal
Materials	Glass, Steel
Brand	ELK Lighting
Collection	Angus
Category	Outdoor Lighting
Type	Sconce

ITEM DIMENSIONS				RATINGS & SPECIFICATIONS				
Width	4.75 inches			Safety Rating	UL		Certification	Wet locations
Depth	7 inches			ADA Compliant	N/A		Voltage	120 volts
Height	13 inches			BULBS / SOCKETS				
Weight	5 pounds			Quantity	1	Wattage	60 watts	
ADDITIONAL DIMENSIONS				Included	No	Type	A19 (E26 Medium Base)	
Backplate / Canopy		4.75x7		Other	N/A			
HCWO		3.5 inches		CHAIN / CORD INFORMATION				
Min. Extension		N/A		Chain	N/A	Cord	8 inches	
Max. Extension		N/A		SHADE / GLASS DETAILS				
OVERALL HEIGHT				Shade/Glass Description		Seedy Glass Enclosure		
Min.	N/A	Max.	N/A					
EXTENSION ROD(S)				Width		N/A	Height	N/A
N/A				Width at Top		N/A	Width at Bottom	N/A

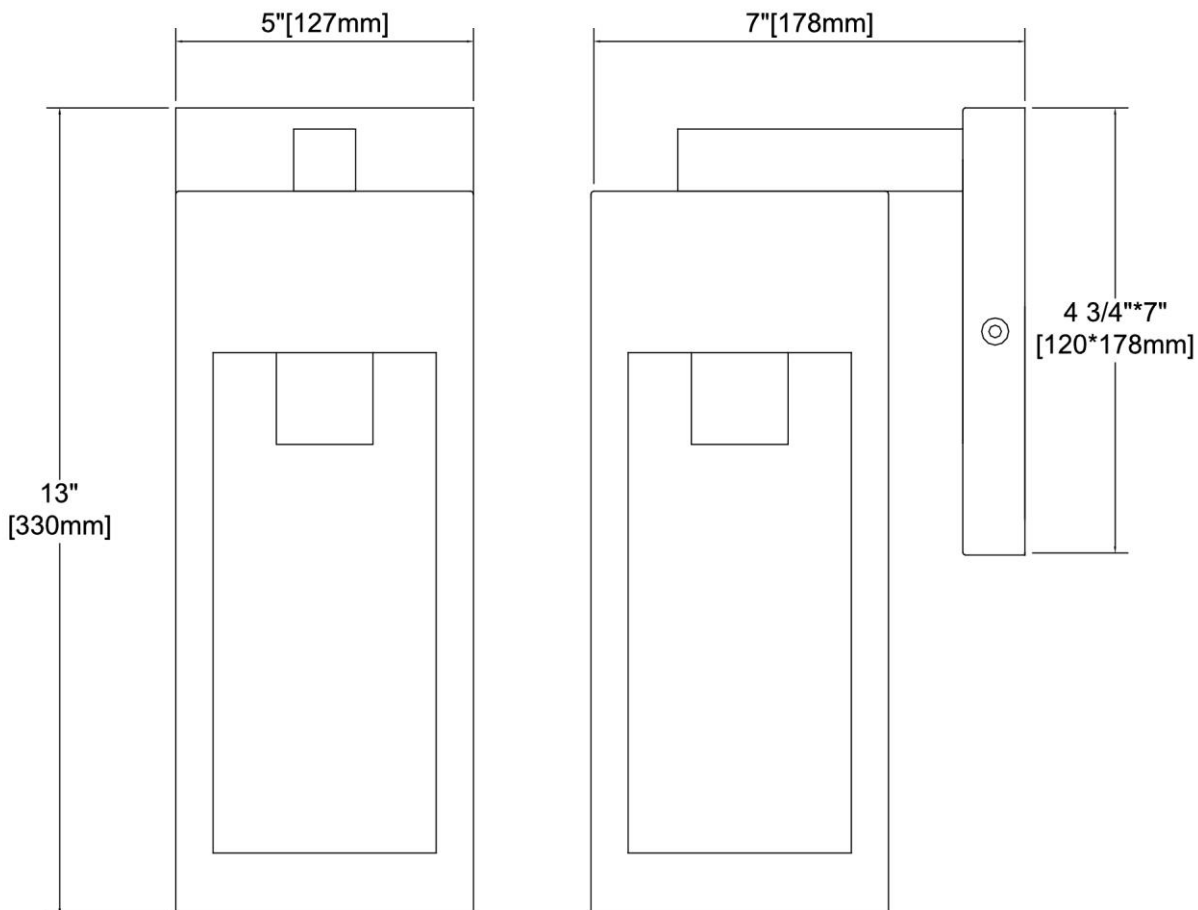

Specification Sheet for Product:

Satco Lighting S12415

**Clear Single 8 Watt Vintage Edison Dimmable A19 Medium (E26)
LED Bulb - 800 Lumens, 3000K, and 90CRI**




S12415

8A19/CL/LED/E26/930/120V

GENERAL SPECIFICATIONS

Shape:	A19
Wattage:	8W
Lumen Output:	800L
Color Temperature:	3000K
Base:	Medium



TECHNICAL SPECIFICATIONS

Wattage:	8W	CRI:	90CRI
Volts:	120V	Lumen Output:	800L
Incandescent Equivalent:	60	Dimmable:	Yes-Dimmable
Shape:	A19	Beam Spread:	320D
Filament:	LED Filament	Power Factor:	0.7
Base:	Medium	Operating Temp:	-20C (-4F) to a maximum of +45C (+113F)
ANSI Base:	E26	Safety Listing:	cULus Listed
Finish:	Clear	Technology:	LED
Hours Rated:	15000H	Material:	Glass; Aluminum
Color Temperature:	3000K		

DIMENSIONS

MOL:	4.02"
MOD:	2.36"
Weight:	0.07

LISTINGS

Safety Listing:	cULus Listed
Location Rating:	Wet
Energy Star:	Pending
FCC Compliant:	Yes
Title 20:	Yes
CEC Terse:	Lawful for sale
JA8 Compliant:	No
RoHS Compliant:	Yes
SDS Class:	LED_Lamp

PACKAGING

Each UPC:	045923124150	Inner UPC:	20045923124154	Case UPC:	10045923124157
Each Quantity:	1	Inner Quantity:	6	Case Quantity:	24
Each Dimensions:	2.52 x 2.52 x 4.57"	Inner Dimensions:	8.07 x 5.51 x 4.92"	Case Dimensions:	22.83 x 8.66 x 5.71"

110 Heartland Blvd.
Brentwood, NY 11717
PH 631-243-2022
FX 631-243-2027

Distribution Centers
New York, Florida,
Texas, Washington,
California, Puerto Rico

National Toll-Free
800-43-SATCO
(800-437-2826)
www.satco.com

Copyright 2021
Satco Products, Inc.
All Rights Reserved
June 10, 2021

COMPATIBLE DIMMERS

Brand	Model #
Leviton	6674
Leviton	TSM10
Lutron	AYCL-153P
Lutron	CTCL-153P
Lutron	CTRP-253P
Lutron	DVCL-153P
Lutron	DVRP-253P
Lutron	LECL-153PH
Lutron	MA-PRO
Lutron	MACL-153M
Lutron	NTCL-250
Lutron	NTRP-250
Lutron	PD-6WCL
Lutron	SCL-153P
Satco	S11268

110 Heartland Blvd.
Brentwood, NY 11717
PH 631-243-2022
FX 631-243-2027

Distribution Centers
New York, Florida,
Texas, Washington,
California, Puerto Rico

National Toll-Free
800-43-SATCO
(800-437-2826)
www.satco.com

Copyright 2021
Satco Products, Inc.
All Rights Reserved
June 10, 2021