

Specification Sheet for Product:

GE Profile PHP9036DTBB

**Black / Black 36 Inch Wide 5 Burner Induction Cooktop with Touch
Controls and Precision Temperature Control**

PHP9036DT

GE Profile™ 36" Built-In Touch-Control Induction Cooktop


DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

IMPORTANT: Requires a 3" free area between the bottom of the cooktop to any combustible material, i.e., shelving. Free area not required when installing wall oven underneath cooktop. Refer to installation instructions. Requires a 15" minimum from cooktop to adjacent overhead cabinets. Units are furnished with a 48" flexible armored cable.

NOTE: 36" induction cooktops are approved for use over select GE 30" Single Wall Ovens and Warming Drawers. Refer to cooktop and wall oven/warming drawer installation instructions packed with product for current dimensional data. If installed with a GE Telescopic Downdraft System, consult both the cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/electric supply may need to be re-routed to install downdraft. The countertop cutout requires 23-1/2" minimum flat countertop surface and 25" minimum total countertop depth. In addition, other clearances to front edge of the countertop must be considered.



Before installing, consult installation instructions packed with product for current dimensional data.

APPROXIMATE COOKING DIMENSIONS

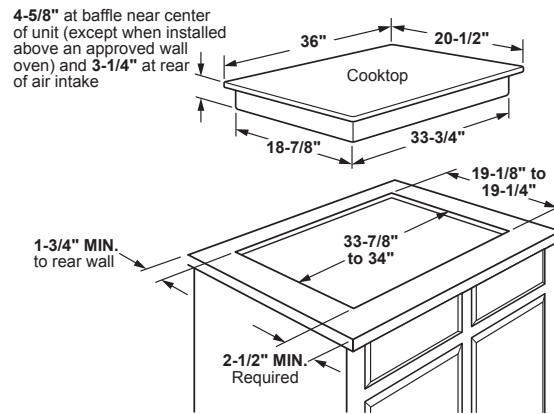

To insure accuracy, it is best to make a template when cutting the opening in the counter

INSTALLATION ABOVE A WALL OVEN

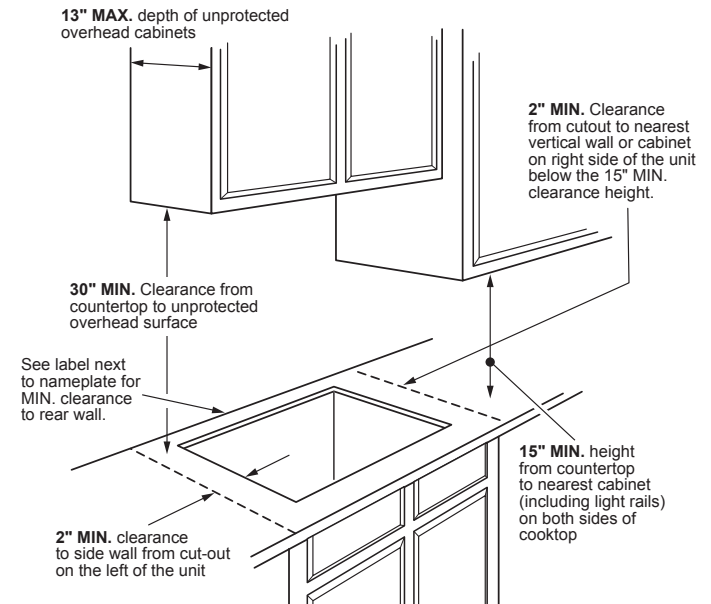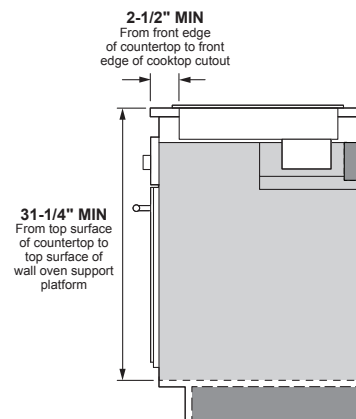

KW RATING	
240V	11.1
208V	9.6
AMPERAGE	
240V	50 Amps†
208V	50 Amps†

†NOTE: Check local codes for required breaker size.



For answers to your Monogram, GE Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Listed by Underwriters Laboratories

PHP9036DT

GE Profile™ 36" Built-In Touch-Control Induction Cooktop

FEATURES AND BENEFITS

Maximum Responsiveness - 19 Control Levels

Power Boil

Precision Temperature Control

Guided Cooking

Easy Clean Surface

Safe Surface

Most Efficient Heating

Synchronized Elements

Chef Connect

Smart Cookware Rebate for 11" Smart Pan


Timer

Built-in WiFi

Control Lock

Fit Guarantee

Model PHP9036DTBB - Black on black

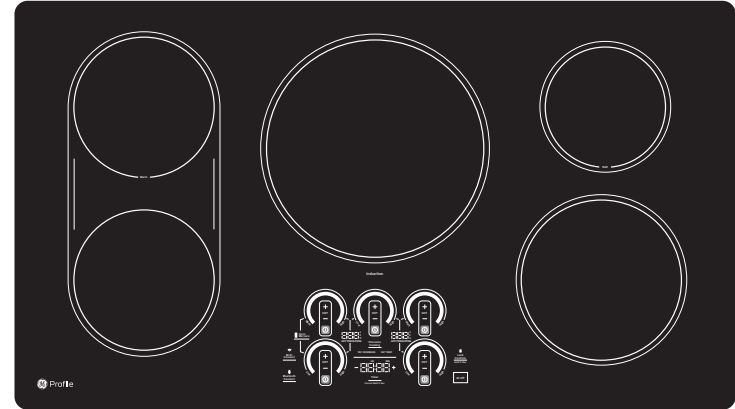

SMART COOKWARE REBATE

Smart pans easily pair with this smart cooktop to ensure you get the perfect cooking results. Earn a rebate for a free 11" Hestan Cue Smart Pan.

OPTIONAL SOUS VIDE PROBE

A Sous Vide Probe lets you achieve great results on the stove. Order part number JXPROBE1.

GUARANTEED FIT

Replacing a similar cooktop from GE Appliances or another brand? GE cooktops are guaranteed for an exact fit or GE Appliances will pay up to \$100 toward modifications.

Visit geappliances.com for more info.



Specification Sheet for Product:

GE Profile UVW9361SLSS

**Stainless Steel 380 CFM 36 Inch Wide Wall Mount Range Hood
with Perimeter Venting and 610 CFM Boost Speed**

UVW9361SL/BL

36" WiFi Enabled Designer Wall Mount Hood w/Perimeter Venting

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

INSTALLATION INFORMATION:

Before installing, consult Use & Care/installation instructions packed with product for current dimensional data.

OPTIONAL ACCESSORIES

UX12DC9SLSS/BLTS – 12(ft.) Ceiling Duct Cover Kit

Max ceiling height installation with kit – 12'-0" (36" hood spacing)



UX14DC9SLSS/BLTS – 14(ft.) Ceiling Duct Cover Kit

Max ceiling height installation with kit – 14'-0"

UXCF91 – Charcoal Filter (needed if used in recirculation mode)

UXRC1 – Remote Control (Wireless)

AMP RATING	
120V	TBD

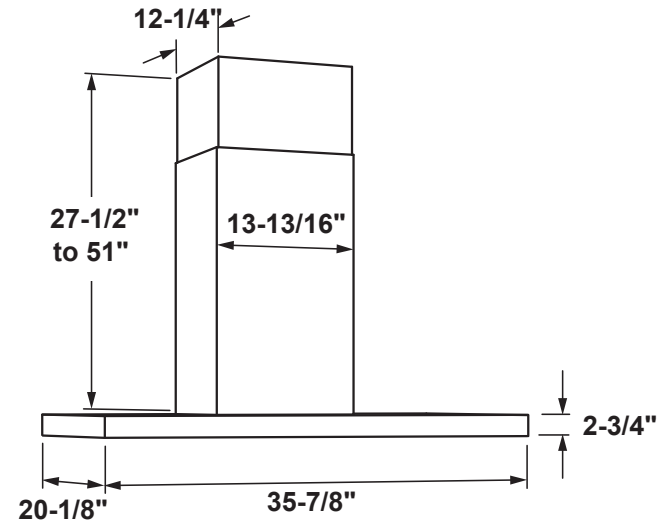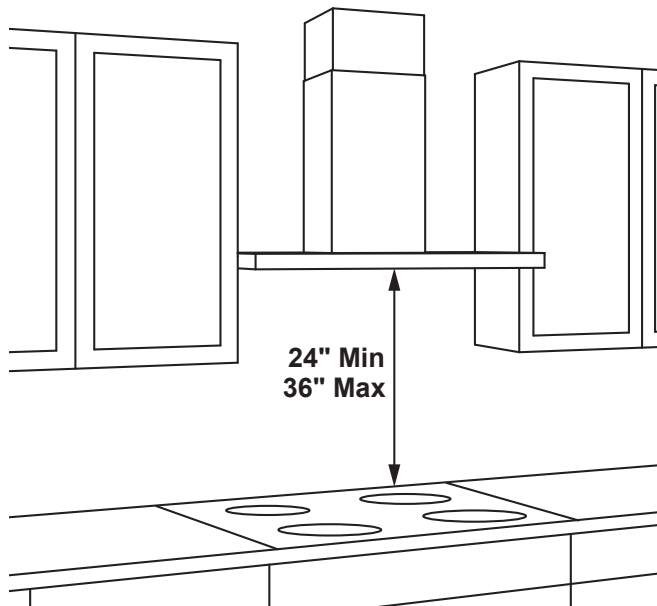

36" models require a 36"-wide opening

*The supplied duct cover fits 7'-7" to 10'-6" ceiling heights
(12' ceiling height with optional high ceiling kit UX12DC9SLSS/UX12DC9BLTS)
(14' ceiling height with optional high ceiling kit UX14DC9SLSS/UX14DC9BLTS)

The vent hood must be installed 24" min. above the cooking surface. For optimal performance, installing the hood more than 36" above the cooking surface is not recommended. The hood installation height above the cooking surface depends upon ceiling height. The telescopic duct cover conceals the ductwork running from the top of the hood to the ceiling.

NOTE: Installation height should be measured from the cooking surface to the lowest part of the hood. This hood may be installed onto a wall and vented to the outdoors, or it can be installed for recirculating operation. Parts for recirculating operation are supplied with the hood.



For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Specification Revised 01/20

UVW9361SL/BL

36" WiFi Enabled Designer Wall Mount Hood w/Perimeter Venting

FEATURES AND BENEFITS

Adjustable CFM blower – High powered 610 CFM blower adjustable downward to either 380 or 290 maximum CFM to accommodate different installation needs

LED backlit glass touch control – Attractive controls are easy to read and instantly wipe clean

Perimeter venting – Provides a clean, modern design that makes a statement of style in any kitchen

WiFi Connect – Control appliances with a smart device or just the sound of your voice

10-ft. ceiling height – Included duct cover extensions reach up to 10' ceilings and work with optional accessories to reach up to 14' ceilings

Triple LED dimmable lighting-bulbs included – LED modules ensure bright lighting for the entire cooking environment

Convertible venting options – Select recirculating or external venting


Remote control included – Activate and adjust your hood functions from anywhere in the kitchen

Timer and clock – Enjoy the convenience of a bright display at the ideal height

Chef Connect – Automatically control the hood's lights and fan by syncing with the range

Model UVW9361SLSS – Stainless steel

Model UVW9361BLTS – Black stainless

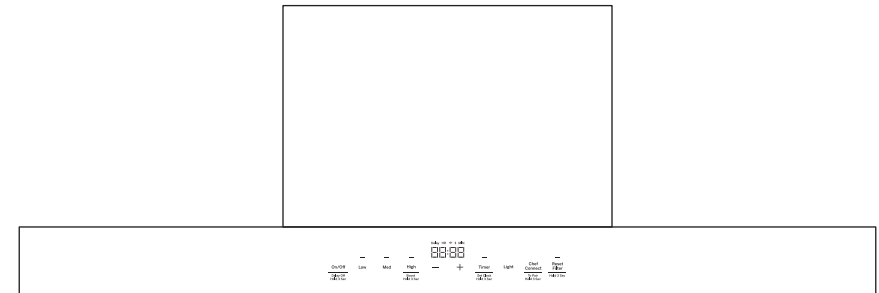

For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.

Specification Sheet for Product:

GE Profile PT9800SHSS

**Stainless Steel 30 Inch Wide Combination Double Wall Oven with
Advantium Technology and True European Convection from the
Profile Series**

PT9800SH

GE Profile™ Series 30" Combination Double Wall Oven with Convection and Advantium® Technology

DIMENSIONS AND INSTALLATION INFORMATION

NOTE: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.


INSTALLATION INFORMATION:

Before installing, consult installation instructions packed with product for current dimensional data.

Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

NOTE: These ovens are not approved for stackable or side-by-side installations.

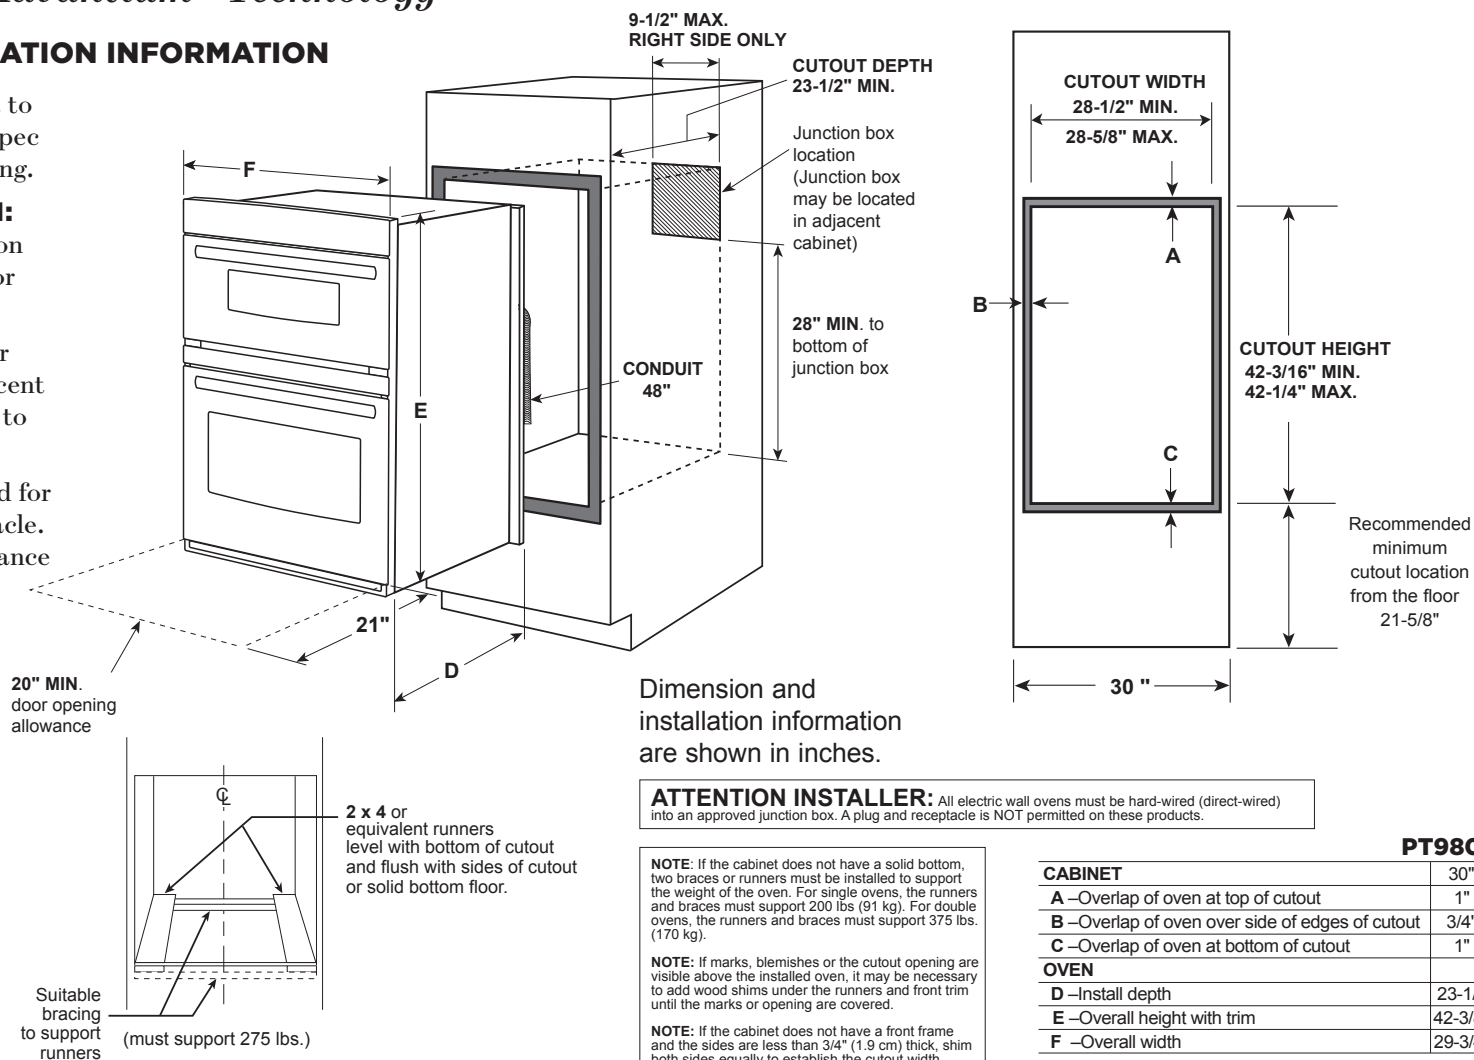

KW RATING	
240V	7.6
208V	5.7
BREAKER SIZE	
240V	30 Amps
208V	30 Amps



For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Listed by
Underwriters
Laboratories



Specification Revised 5/16

PT9800SH

GE Profile™ Series 30" Combination Double Wall Oven with Convection and Advantium® Technology

FEATURES AND BENEFITS

Speedcook oven 120V (upper oven) - Enjoy oven-quality results two to four times faster than a conventional oven

Multiple cooking functions (upper oven) - Expand your cooking versatility with an all-in-one oven

Halogen heat (upper oven) - Skip the preheating with nearly instantaneous halogen heat

Over 175 preprogrammed menu selections (upper oven) - Preprogrammed selections make meals easy

True European convection (lower oven) - Achieve delicious results from a third heating element and fan combination

Self-clean with steam clean option (lower oven) - Clean your oven the way you want

Self-clean heavy-duty oven racks (lower oven) - Conveniently clean your oven and racks together

Glass touch controls - Set temperatures quickly and clean with little effort

Ten-pass bake element (lower oven) - Even baking is assured with heat that covers more surface area


Eight-pass broil element (lower oven) - Get full broil coverage and even browning from edge to edge

- Model PT9800SHSS – Stainless steel

GUARANTEED FIT

Replacing a similar wall oven from GE or another brand? GE wall ovens are guaranteed for an exact fit to make replacement easy

Visit geappliances.com for more info

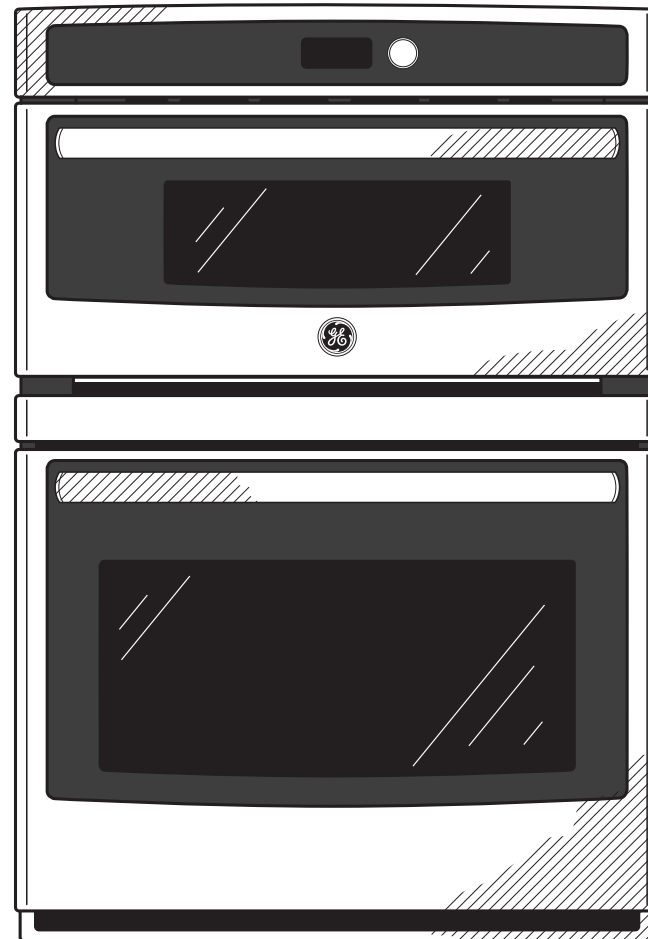

Specification Sheet for Product:

GE GWE23GYNFS


**Fingerprint Resistant Stainless 36 Inch Wide 23.1 Cu. Ft. Energy
Star Rated Fingerprint Resistant French Door Refrigerator with
TwinChill Evaporators and Ice Maker**

GWE23GEN/GMN/GYN

GE® ENERGY STAR® 23.1 Cu. Ft. Counter-Depth French-Door Refrigerator

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

Height to top of door (in.) A	70-1/2
Height to top of hinge (in.) B	69-7/8
Height to top of case (in.) C	69
Case depth without door (in.) D	24-3/8
Case depth less door handle (in.) E	29-3/4
Case depth with door handle (in.) F	31-1/4
Depth with fresh food door open 90° (in.) G	43-3/8
Width (in.) H	35-3/4
Width with door open 90° with door handle (in.) I	44-5/8
Width with doors open fully (in.) J	68
Min distance between side of case and wall, in either direction, to allow doors to open fully (in.) K	16-1/8
Depth with FZ door completely open (w/o handle) (in.) X	44-3/4
Depth with FZ door completely open (w/ handle) (in.) Y	46-1/4

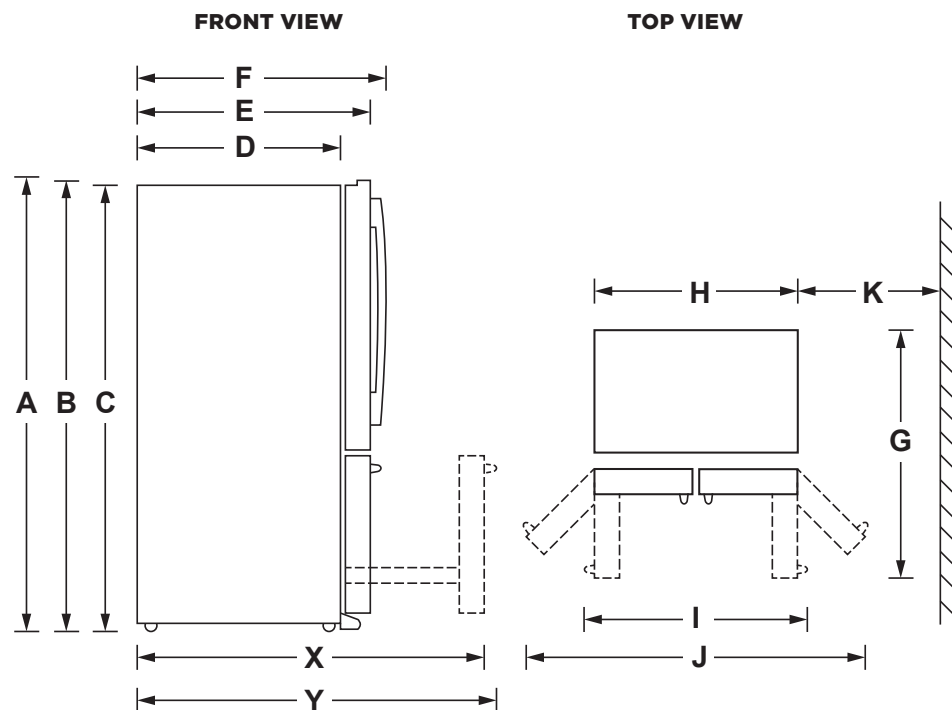

For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Listed by
Underwriters
Laboratories



As an ENERGY STAR® partner, GE has determined that this product meets the ENERGY STAR guidelines for energy efficiency.

GWE23GEN/GMN/GYN

GE® ENERGY STAR® 23.1 Cu. Ft. Counter-Depth French-Door Refrigerator

FEATURES AND BENEFITS

Counter-depth design – Offers a built-in look by fitting nearly flush with surrounding cabinetry

Fingerprint resistant stainless – Easily wipe away smudges and fingerprints for a look that's always sparkling clean (for GWE23GYNFS model only)

TwinChill™ evaporators – Separate climates in the fresh food and freezer sections help keep foods fresh

Showcase LED lighting – Positioned throughout the interior and under fresh food doors to spotlight foods inside the refrigerator and in the freezer

Two humidity-controlled drawers and full-width drawer with LED light – Create the right environment for keeping fruits and vegetables fresh, while easily storing wider items like a party platter or a sheet cake

Factory-installed icemaker with water filtration system – Refrigerator comes ready to automatically create filtered ice

Advanced water filtration uses RPWFE replacement filter – Reduces trace pharmaceuticals from water and ice* (* Removes 98% of ibuprofen, atenolol, fluoxetine, progesterone and trimethoprim. These pharmaceuticals are not necessarily in all users' water)

Internal controls with actual-temperature display - Eliminate the guesswork of temperature setting with actual degrees displayed digitally

Door alarm - Enjoy peace of mind knowing the refrigerator door is never left open

Two-level freezer storage baskets – Baskets allow easy access to frozen foods


Gallon door storage – Deep bins handle large containers in the door and free up valuable shelf space

Spill-proof shelves – A variety of shelf configurations provide additional options for food storage

Model GWE23GENDS – Black Slate

Model GWE23GMNES – Slate

Model GWE23GYNFS – Fingerprint Resistant Stainless

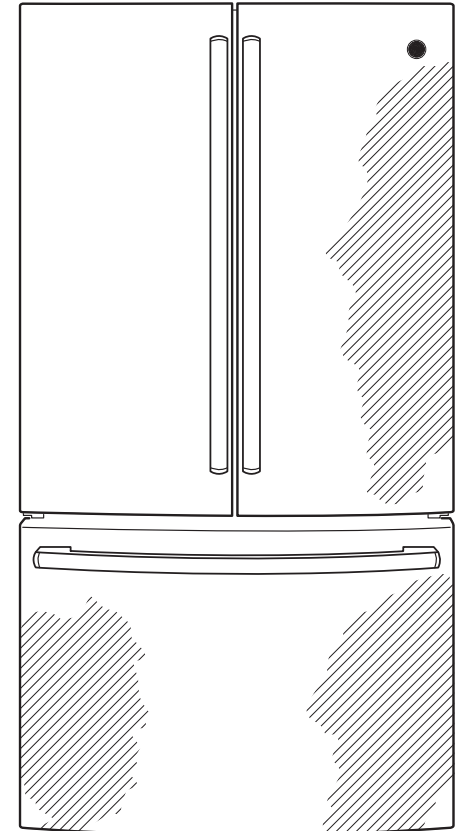

Specification Sheet for Product:

GE Profile PDT785SYNFS

**Fingerprint Resistant Stainless Steel Profile 24 Inch Wide 16 Place
Setting Energy Star Rated Built-In Top Control Dishwasher with
Stainless Steel Interior**

PDT785SBN/SYN

GE Profile™ Series Stainless Steel Interior Dishwasher with Hidden Controls



DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

ELECTRICAL RATING

Voltage AC.....	120
Hertz.....	60
Total connected load amperage.....	10.2
Calrod® heater watts max.....	400/1200

For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

INSTALLATION INFORMATION: Before installing, consult installation instructions packed with product for current dimensional data.

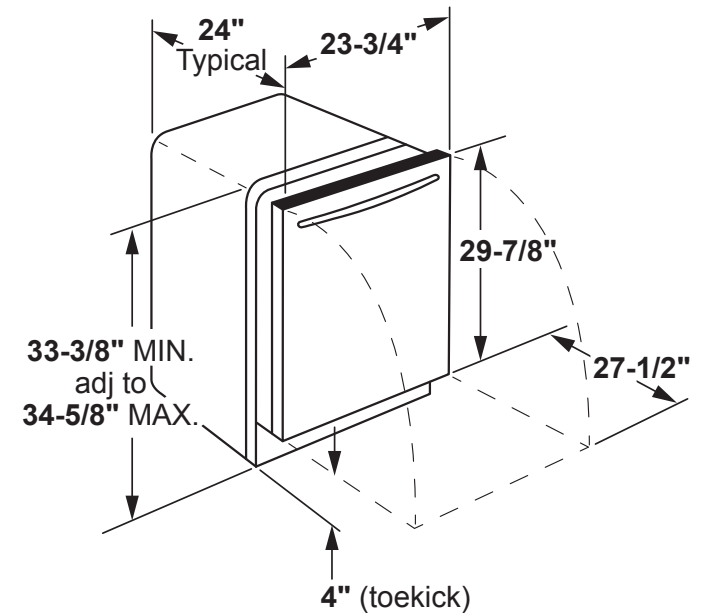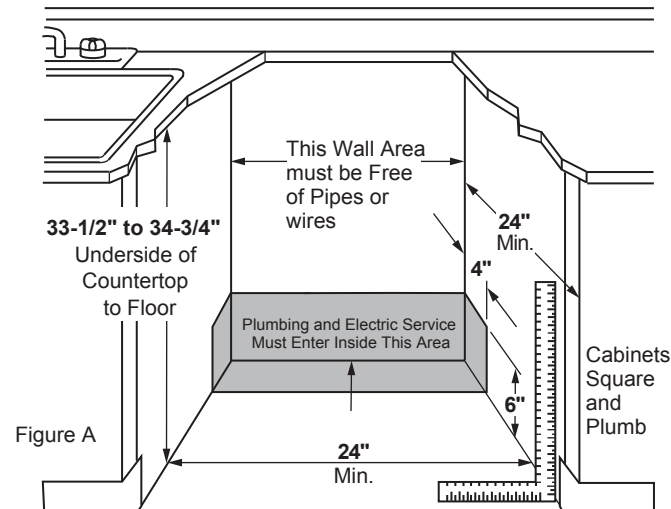

For answers to your GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Listed by
Underwriters
Laboratories



As an ENERGY STAR® partner, GE has determined that this product meets the ENERGY STAR guidelines for energy efficiency.

Specification Revision 9/19

PDT785SBN/SYN

GE Profile™ Series Stainless Steel Interior Dishwasher with Hidden Controls

FEATURES AND BENEFITS

Twin Turbo Dry Boost – Ensure a complete dry with every cycle, thanks to a dual fan system and inline heater that provide exceptional performance, even with plastics

WiFi Connect – Monitor cycle status, check rinse aid levels and automatically reorder detergent using your mobile device

Deep Clean Silverware Jets – No matter how you load your silverware basket, powerful jets blast away stuck-on food for silverware that's always spotless

Leak Defense with Active Flood Protect – Uncommon leaks can be easily detected and contained

Bottle Jets - Clean hard-to-reach areas inside tall items with up to 4 dedicated jets integrated into the upper rack that shower water deep inside for the ultimate clean

Third Rack – Now there's a place for miscellaneous items and gadgets, thanks to an additional rack at the top of the dishwasher that's ideal for plastic lids, pizza slicers and more

Piranha Hard Food Disposer – To ensure consistently clean items, this stainless steel blade rotates at 3,600 RPM to pulverize food particles and helps to prevent large particles from clogging the wash arms

1 Hour Wash – Enjoy a quality clean when you're short on time


Steam + Sani – Loosens tough soils before any cycle virtually eliminating the need for soaking or pre-rinsing dishes. Plus a High-temperature rinse sanitizes and reduces 99.999% of bacteria found on dishes

16 place settings – Extra capacity to ensure easy cleanup from your largest gatherings

39 dBA – Ultra-quiet operation creates a peaceful kitchen environment even as it delivers powerful wash performance

Model PDT785SYNFS – Fingerprint Resistant Stainless

Model PDT785SBNTS – Black Stainless

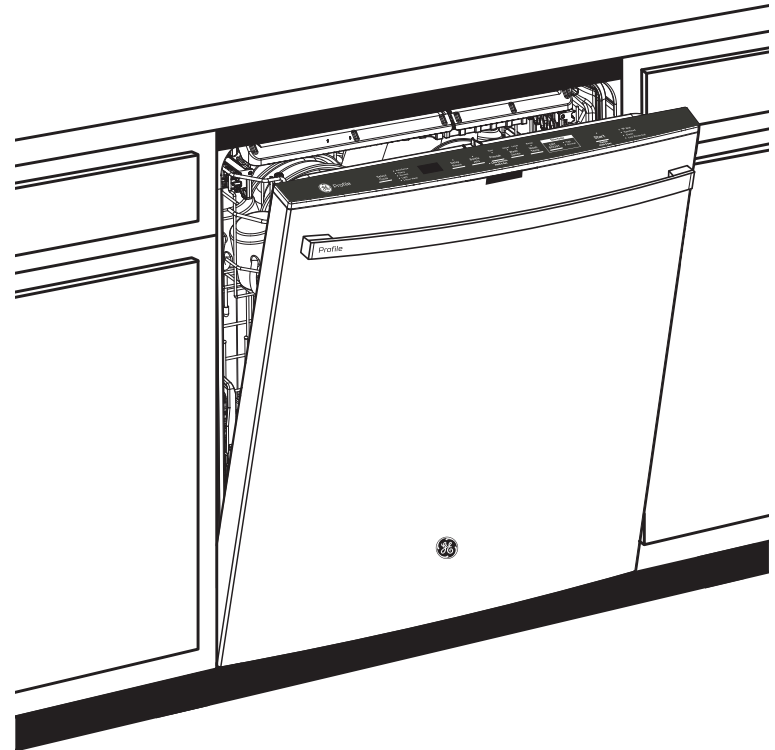

Specification Sheet for Product:

LG WM6500HBA

**Black Steel 27 Inch Wide 5 Cu. Ft. Energy Star Certified Front
Loading Washing Machine with AI DD and TurboWash 360°**

LG LAUNDRY

WM6500H_A

5.0 cu. ft. Mega Capacity Smart Front Load Energy Star
Washer with TurboWash® 360° and AI DD® Built-In Intelligence

- 5.0 cu. ft. Mega Capacity
Digital Dial Control with LCD Display & Touch Button Control Panel
TurboWash® 360° Technology
AI DD®: AI Fabric and Weight Sensors with Smart Pairing
LG ThinQ® Technology with ThinQ Care
Allergiene® Cycle
Cold Wash Technology
NeveRust® Stainless Steel Drum
ENERGY STAR® Certified & ENERGY STAR Most Efficient
Direct Drive Motor 10-Year Limited Warranty

AVAILABLE COLORS

- BLACK STEEL
- WHITE



Proactive Smart Alerts to Keep
Your Appliances Running Smoothly

ThinQ Care

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.



SUMMARY		WASH DETAILS		MOTOR AND AGITATOR	
Type	Front Load Washer	No. of Wash/Rinse Temps	5	Motor Type	Inverter Direct Drive Motor
Capacity (cu. ft.)	5.0 cu. ft.	Wash/Rinse Temps	Ex. Hot, Hot, Warm, Cold, Tap Cold	Axis	Horizontal
Matching Electric Dryer	DLEX6500B / DLEX6500W	No. of Spin Speeds	5	MATERIALS AND FINISHES	
Matching Gas Dryer	DLGX6501B / DLGX6501W	Spin Speeds	Ex. High, High, Medium, Low, No Spin	NeveRust® Stainless Steel Drum	Yes
Color	Black Steel (B), White (W)	Max RPM	1300	Cabinet	Painted Steel
APPEARANCE		Water Levels	Load Sensing	Control Panel	Painted Steel
LCD Display	Yes	No. of Soil Levels	5	Top Plate	Painted Steel
Touch Buttons	Yes	FABRIC CARE FEATURES		Door / Rim	Glass / Shiny Rose Gold
Dial-A-Cycle®	Yes	AI DD®	Yes	Door Cover	Tempered Glass Door
ENERGY		TurboWash® 360 Technology	Yes	All Available Colors	Black Steel (B), White (W)
ENERGY STAR® Most Efficient	Yes	Steam Technology	Yes	CERTIFICATION	
ENERGY STAR® Certified	Yes	Allergiene® Cycle	Yes	AAFA	Yes
CEE Tier	Tier2	Sanitary Cycle	Yes	POWER SOURCE	
IMEF	2.92	Cold Wash Option	Yes	Ratings	UL Listed
IWF	3.0	CONVENIENCE FEATURES		Electrical Requirements	120V, 10 Amps
WASH PROGRAMS		Vibration Sensing (Cabinet Vibration Sensor)	Yes	Type	Electric
No. of Programs	25	TrueBalance® Anti-Vibration System	Yes	OPTIONS/ACCESSORIES	
Wash Programs	Normal, AI Wash, Bedding, Delicates, Towels, Quick Wash, Heavy Duty, Allergiene®, Perm. Press, Tub Clean, Bright Whites™, Sanitary, Rinse+Spin, Spin Only, Hand/Wool, Active Wear, Swimwear, Kids Wear, Jeans, Dresses, Color Care, Sweat Stains, Small Load, Large Load, X Large Load	4 Tray Dispenser	Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener	Pedestal	WDP6B, WDP6W
		End of Cycle Signal	Yes	Pedestal (WxHxD)	27" x 13 5/8" x 25 3/8" (43 7/8" D with door open)
		LoadSense	Yes	LG Sidekick™ Pedestal Washer	WD300CB, WD300CW
		Control Lock	Yes	LG Sidekick™ Pedestal Washer (WxHxD)	27" x 14 1/8" x 30 3/4" (50 1/2 with drawer open)
		Auto Suds Removal	Yes	Stacking Kit	KSTK4
		Leveling Legs	4 Adjustable Legs	DIMENSIONS	
No. of Options	15	Drum Light	Yes	Product (WxHxD)	27" x 39" x 33 1/8"
Options	TurboWash®, Steam, Fresh Care, Pre-wash, Remote Start, Delay Wash, Wi-Fi, Add Item, Extra Rinse, Control Lock, Drum Light, ColdWash, Signal, Cycle List Edit, Cycle Optimization	ThinQ® TECHNOLOGY		Depth with Door Open	57 3/4"
		Smart Diagnosis	Yes	Carton (WxHxD)	29 1/2" x 42 1/8" x 34 1/4"
		Wi-Fi	Yes	Weight (Product/Carton)	202.6 / 216.5 lbs.
		ThinQ Care	Yes	LIMITED WARRANTY	
		Energy Monitoring	Yes	Parts and Labor	1 Year
		Tub Clean Coach	Yes	Direct Drive Motor	10 Years
				Drum	3 Years
		UPC CODES			
				WM6500HBA (Black)	195174052921
				WM6500HWA (White)	195174048689

Specification Sheet for Product:

LG DLHC5502B

**Black 27 Inch Wide 7.4 Cu. Ft. Energy Star Certified Electric Dryer
with LED Display and Knob Controls**




LG LAUNDRY

DLHC5502_

7.8 cu. ft. Mega Capacity Smart Front Load Dryer with Dual Inverter HeatPump™ Technology and Inverter Direct Drive Motor System

- 7.8 cu. ft. Mega Capacity
- Sleek Ventless Design
- LCD Digital Dial Control
- Dual Inverter Heat Pump™ Technology & Inverter Direct Drive Motor System
- Built-In Intelligence: AI Sensor Dry with Infrared Sensor
- ThinQ® Smart Technology & ThinQ UP™ & ThinQ Care™
- Auto Cleaning Condenser™
- ENERGY STAR® Most Efficient
- Closet Depth
- NeveRust® Stainless Steel Drum
- LoDecibel® Quiet Operation
- Wrinkle Care Option
- 3-Stage Lint Filter

AVAILABLE COLORS

-  GRAPHITE STEEL
-  WHITE
-  BLACK STEEL



SUMMARY	
Dryer Type	Electric
Direct Drive Motor	Yes
Type	Front Load Dryer
Vent Type	Ventless
Capacity	7.8 cu.ft
Sensor Dry	Yes
APPEARANCE	
LCD Display	Yes
Dial-A-Cycle®	Yes
Touch Buttons	Yes
Colors	Graphite Steel (V), White (W), Black Steel (B)
DRYER PROGRAMS	
No. of Programs	23
Dry Programs	Normal, AI Dry, Bedding, Small Load, Delicates, Bedding Refresh, Power Dry, Down Jacket Refresh, Timed Dry, Drum Care, Towels, Perm. Press, Activewear, Quick Dry, Outerwear Refresh, Shrinkage Relief, Silent Dry, Rainy Days, Heavy Duty, Easy Ironing, Air Dry, Condenser Care, Downloaded
No. of Options	11
Options	Wrinkle Care, Control Lock, Wi-Fi, Remote Start, Drum Light, Signal, Damp Signal, Cycle List Edit, Cycle Optimization, Smart Diagnosis, Reset Settings
Temperature Settings	No
Drying Levels	Very, More, Normal, Less, Damp
Dry Mode	Normal, Energy, Speed
Manual Dry Times	30 min - 180 min

FABRIC CARE FEATURES	
AI Sensor Dry	Yes
Sensor Dry 2.0 with IR Sensor	Yes
Precise Temperature Control with Variable Heater	No
Precise Temperature Control with Variable Compressor	Yes
6 Motion Dry	Yes
Steam	No
CONVENIENCE FEATURES	
End of Cycle Signal	Yes
Drum Light (Door Open)	Yes
Reversible Door	No
Wrinkle Care Option	Yes
Control Lock	Yes
4 Adjustable Legs	Yes
Remaining Time Display / Status Indicator(s)	Yes
Auto Cleaning Condensor	Yes
ThinQ® TECHNOLOGY	
Smart Diagnosis	Yes
Wi-Fi	Yes
ThinQ Care	Yes
ThinQ Up	Yes
Remote Start and Cycle Monitor	Yes
Energy Monitoring	Yes
ENERGY	
ENERGY STAR® Certified	Yes
ENERGY STAR® Most Efficient	Yes
CEF	Electric: 3.94 / Gas: 3.49

MATERIALS AND FINISHES	
NeveRust® Stainless Steel Drum	Yes
Cabinet	Painted Steel
Door	Tempered Glass Door
All Available Colors	Graphite Steel(V), White (W), Black Steel(B)
POWER SOURCE	
Ratings	CSA Listed
Type	Heat Pump
Electrical Requirements	240V, 830W or 208V, 820W 15 Amp Circuit
OPTIONS	
Stacking Kit	HSTK1B
Pet Care Kit	PETK1W
Pedestal	WPD6V, WDP6W, WDP6B
Pedestal (WxHxD)	27" x 13 5/8" x 28" (43 7/8" D with door open)
Sealing Cover(Cap cover)	Yes
DIMENSIONS	
Product (WxHxD)	27" x 39" x 32 1/4"
Depth with Door Open	52 3/4"
Carton (WxHxD)	30 1/6" x 42 3/4" x 33 9/16"
Product Weight (lbs.)	165.5 lbs..
Carton Weight (lbs.)	172.0 lbs.
LIMITED WARRANTY	
Parts & Labor	1 Year
Drum	3 Years
Direct Drive Motor	10 Years
Inverter Compressor	10 Years
UPC CODES	
DLHC5502V (Graphite Steel)	195174061640
DLHC5502B (Black Steel)	195174069981
DLHC5502W (White)	195174061657